

JOB NAME _____ LOCATION _____
 PURCHASER _____ ORDER NO. _____
 ENGINEER _____
 SUBMITTED TO _____ FOR: Reference Approval Construction
 SUBMITTED BY _____ DATE _____

UNIT DESIGNATION: Schedule No. _____ MODEL NO. _____

PRODUCT DATA

COOLING PERFORMANCE

TOTAL CAPACITY MBH
 OUTDOOR DESIGN TEMP. °F

ELECTRICAL DATA

POWER SUPPLY / /
 TOTAL UNIT AMPACITY AMPS
 POWER INPUT REQ. KW
 MINIMUM WIRE SIZE AWG
 MAXIMUM OVERCURRENT DEVICE
 FUSES CIRCUIT BREAKER AMPS

UNIT WEIGHT

TOTAL UNIT WEIGHT LBS.

FEATURES:


- UL approval (units & accessories).
- CSA listed and ARI certified.
- 5-year limited parts warranty on the 1 phase units.
- 1-year limited parts warranty on the 3 phase units.
- 5-year limited warranty on the compressor.
- Copper tube / coated blacked aluminum coil fins.
- Internally protected compressor.
- Propeller type fan.
- Durable construction.
- Pre-painted Steel Cabinet.
- Factory wired.
- R-22 total system charge (thru 15 ft. of lines on sweat units).
- Factory tested.
- Sweat and quick (1 Ø, 1-5 ton only) refrigerant connections.
- Re-useable service valves on sweat units.
- Easy access to electrical and compressor compartments.

FIELD INSTALLED ACCESSORIES:

- Stub Adapters (# _____)
- Precharged Line Sets (# _____)
- Off Cycle Timer (2TD08700124)
- Thermostats (# _____)
- Blower Off Delay (2FD06700224)
- Solenoid Valve Kit (2SV06700124)
- Hard Start Kit (# _____)

NOTES:

DIMENSIONS - INCHES

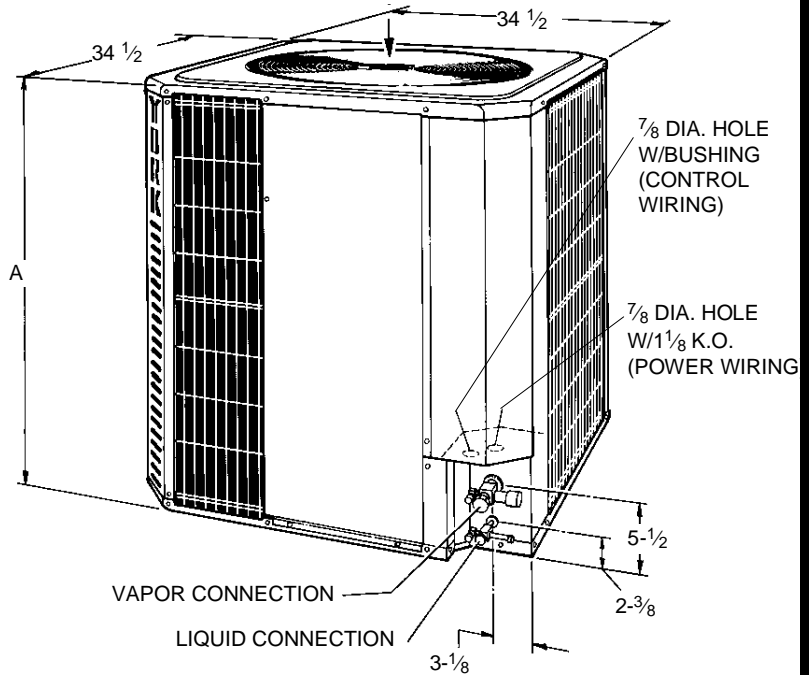

MODEL	DIMENSIONS A	REFRIGERANT CONNECTION			
		QUICK CONNECT		LINE SIZE	
		LIQUID	VAPOR	LIQUID	VAPOR
H1DB060	31 1/8	MALE-6	MALE-11	3/8	7/8
H1DB076	31 7/8	-	-	1/2	1 1/8

CLEARANCES

Front of unit 24 inch
 All Other Sides 12 inch
 Above Unit 48 inch
 Below Unit 0 inch

MATCHING AIR SIDE EQUIPMENT:

Model No. (_____)
 Submittal Form No. (_____)

Refer to form 550.38-TG1Y for detailed specifications on the unit and its accessories. Subject to change without notice. Printed in the U. S. A.

SPLIT SYSTEM, CONDENSING UNITS
 MODELS H1DB060 and H1DB076
 5 and 6 Ton

FORM 550.38-SD2Y (596)

Supersedes: 550.38-SD2Y (894)

